

SN 09/998,685  
Page 4






**Amendments to the Claims**

1. (amended) A method for producing a printing plate precursor comprising:
  - (a) applying to a substrate a coating composition comprising a photothermal converter and at least one polymer comprising thiosulfate groups to obtain a coating; and
  - (b) applying a water soluble topcoat to the coating, wherein the water soluble topcoat reduces effluence of the coating.
2. (amended) A method for producing a printing plate precursor comprising:
  - (a) applying to a substrate a coating composition comprising a photothermal converter and at least one polymer comprising thiosulfate groups to obtain a coating; and
  - (b) applying a water soluble topcoat to the coating, wherein the water soluble topcoat does not comprise a photothermal converter and reduces effluence of the coating.
3. (original) The method of claim 1, wherein the water soluble topcoat comprises a water soluble polymer comprising monomeric units selected from the group consisting of amide units, polyoxazoline units, and mixtures thereof.
4. (amended) The method of claim 3, wherein the water soluble polymer is ~~selected from the group consisting of~~ poly(N-vinylpyrrolidone), a copolymer of N-vinylpyrrolidone and vinyl acetate, poly(2-ethyl-2-oxazoline), ~~and~~ or mixtures thereof.

SN 09/998,685  
Page 5

5. (original) The method of claim 1, wherein the photothermal converter is an infrared dye.

6. (amended) The method of claim 5, wherein the infrared dye is selected from the group consisting has the formula of compounds IN, I-V where TEA= triethylammonium:

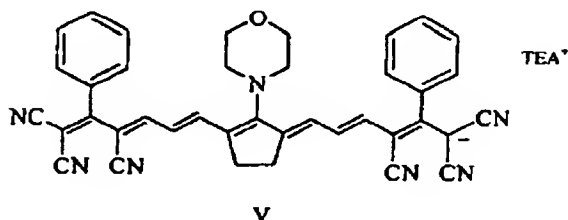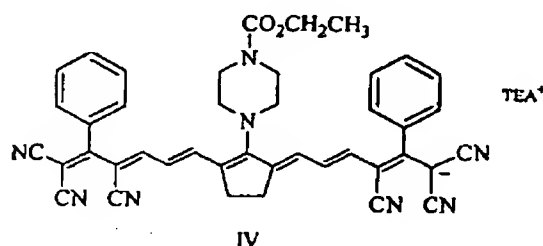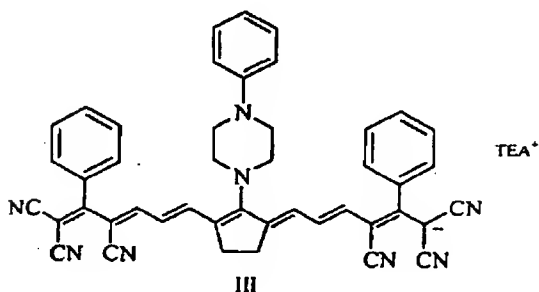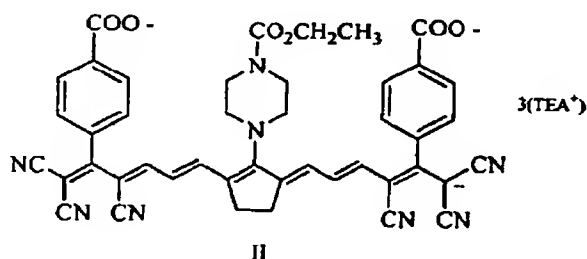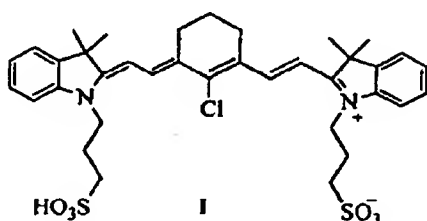

and wherein TEA<sup>+</sup> is a triethylammonium cation.


7. (original) The method of claim 1, wherein the polymer comprising thiosulfate groups has a molecular weight in the range of 1,000 - 1,000,000.

SN 09/998,685

Page 6


8. (original) The method of claim 1, wherein the number of thiosulfate-containing monomeric units in the polymer comprising thiosulfate groups is from about 10% to about 100% of the total number of monomeric units.

9. (amended) The method of claim 1, wherein the polymer comprising thiosulfate groups is the polymer having structure VIa: VIa



wherein P represents a polymeric backbone, X is a divalent linking group, and Y is a hydrogen or a cation.

10. (amended) The method of claim 1, wherein the polymer comprising thiosulfate groups is the polymer having structure ~~VIb~~: VIb

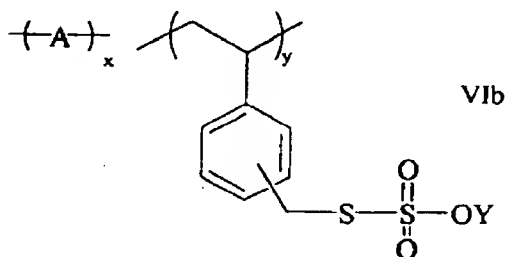



wherein y has a nonzero value, the ratio x:y ranges from 0 to about 9, A is an unsaturated polymerizable comonomer, and Y is a hydrogen or a cation.

11. (amended) The method of claim 10, wherein A is ~~selected from the group consisting of acrylates~~ an acrylate, ~~methacrylates~~ methacrylate, styrene and its derivatives, ~~acrylamides~~ acrylamide, ~~methacrylamides~~ methacrylamide, ~~olefins~~ olefin, and vinyl halides vinyl halide, and or combinations thereof.


SN 09/998,685

Page 7

12. (original) The method of claim 1, wherein the coating composition comprises about 1 to about 25 wt % of solids.
13. (original) The method of claim 1, wherein the coating composition provides a dry coverage of about 10 to about 1000 mg/ft<sup>2</sup>.
14. (amended) A method for producing a printing plate precursor comprising applying to a substrate a composition comprising:
- (a) a photothermal converter;
  - (b) at least one polymer comprising thiosulfate groups; and
  - (c) ~~an additive selected from the group consisting of a diazonium,~~  
iodonium, copper(I), alkoxypyridinium and maleimide additives  
additive and or mixtures thereof.
15. (original) The method of claim 14, wherein the photothermal converter is an infrared dye.
16. (amended) The method of claim 15, wherein the infrared dye ~~is selected from the group consisting~~ has the formula of compounds ~~IN, I-V~~ where TEA = ~~triethylammonium~~:

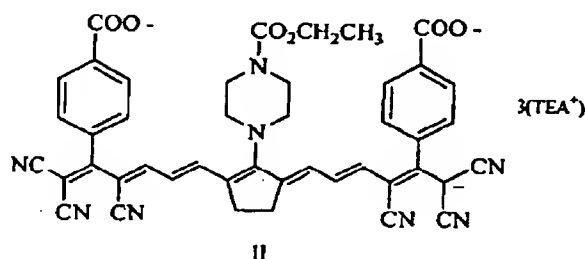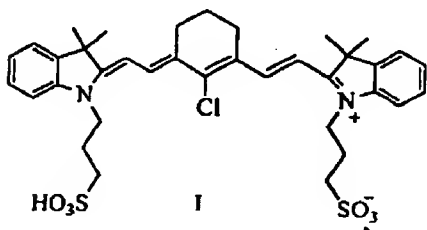


SN 09/998,685  
Page 8

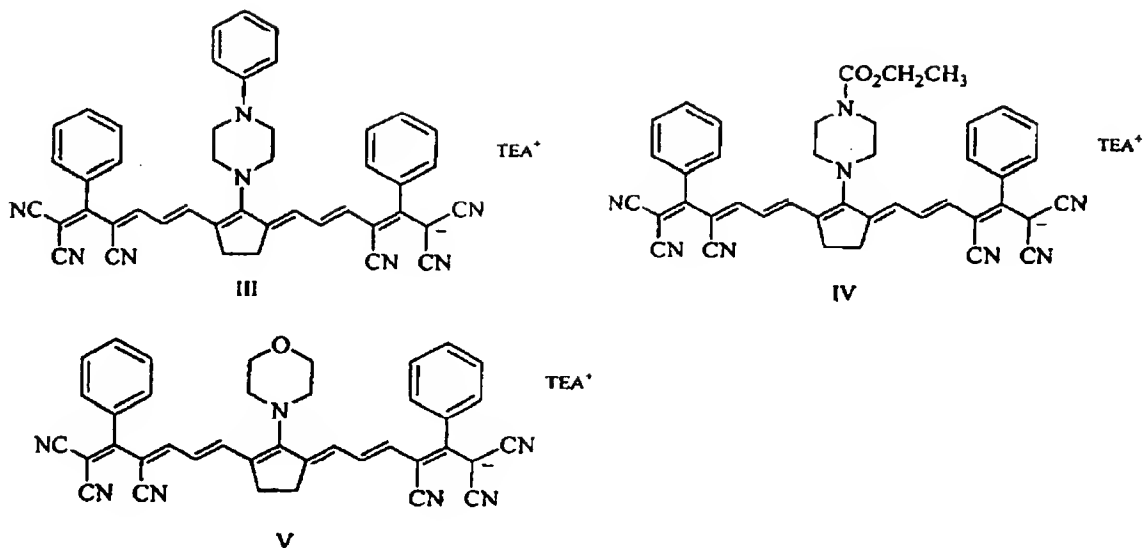

and wherein TEA<sup>+</sup> is a triethylammonium cation.


17. (original) The method of claim 14, wherein the polymer comprising thiosulfate groups has a molecular weight in the range of 1,000 - 1,000,000.
18. (original) The method of claim 14, wherein the number of thiosulfate-containing monomeric units in the polymer comprising thiosulfate groups is from about 10% to about 100% of the total number of monomeric units.
19. (amended) The method of claim 14, wherein the polymer comprising thiosulfate groups is the polymer having structure VIa: VIa



wherein P represents a polymeric backbone, X is a divalent linking group, and Y is a hydrogen or a cation.

SN 09/998,685  
Page 9

20. (amended) The method of claim 14, wherein the polymer comprising thiosulfate groups is the polymer having structure ~~VIb~~: VIb

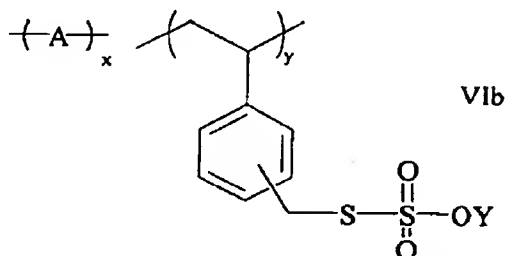


wherein y has a nonzero value, the ratio x:y ranges from 0 to about 9, A is an unsaturated polymerizable comonomer, and Y is a hydrogen or a cation.

21. (amended) The method of claim 20, wherein A is ~~selected from the group consisting of acrylates an acrylate, methacrylates methacrylate~~, styrene and its derivatives, ~~acrylamides acrylamide, methacrylamides methacrylamide, olefins olefin, and vinyl halides vinyl halide, and or combinations thereof.~~


22. (original) The method of claim 14, wherein the coating composition comprises about 1 to about 25 wt % of solids.

23. (original) The method of claim 14, wherein the coating composition provides a dry coverage of about 10 to about 1000 mg/ft<sup>2</sup>.

24. (amended) The method of claim 14, wherein the diazonium additive is ~~selected from the group consisting of compounds VII and VIII~~: compound VII or VIII




VII



VIII


SN 09/998,685  
Page 10

25. (amended) The method of claim 14, wherein the iodonium additive is compound ~~IX~~: IX

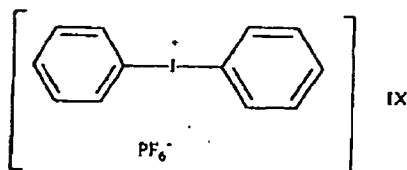

26. (original) The method of claim 14, wherein the copper(I) additive is copper(I) gluconate.

27. (amended) The method of claim 14, wherein the alkoxy pyridinium additive is compound ~~X~~: X

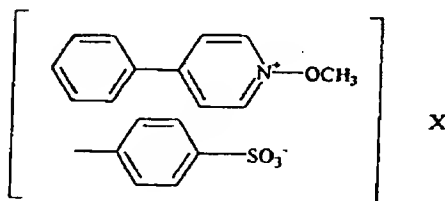

28. (original) The method of claim 14, wherein the maleimide additive is N-ethylmaleimide.

29. (amended) A printing plate precursor comprising:

- (a) a substrate;
- (b) a coating applied to the substrate, wherein the coating comprises a photothermal converter and at least one polymer comprising thiosulfate groups; and
- (c) a water soluble topcoat residing on the coating, wherein the water soluble topcoat reduces effluence of the coating.

SN 09/998,685  
Page 11

30. (amended) A printing plate precursor comprising:
- (a) a substrate;
  - (b) a coating applied to the substrate, wherein the coating comprises a photothermal converter and at least one polymer comprising thiosulfate groups; and
  - (c) a water soluble topcoat residing on the coating, wherein the water soluble topcoat does not comprise a photothermal converter and reduces effluence of the coating.
31. (amended) A printing plate precursor comprising:
- (a) a substrate; and
  - (b) a coating applied to the substrate, the coating comprising
    - (i) a photothermal converter;
    - (ii) at least one polymer comprising thiosulfate groups; and
    - (iii) ~~an additive selected from the group consisting of a~~ diazonium, iodonium, copper(I), ~~alkoxypyridinium and~~ alkoxypyridinium, maleimide additives additive and or mixtures thereof.